

L.A. ROCKER SPEAKER: RIVER ROCK

ARCHITECTS AND ENGINEERS
SPECIFICATIONS / TECHNICAL DATA

GENERAL SPECIFICATIONS


| MODEL: | IMPEDANCE | SYSTEM TYPE | MAX POWER (WATTS) | FREQUENCY RESPONSE | SENSITIVITY | DISPERSION | CROSSOVER |
|---------------------|-----------|-------------|-------------------|--------------------|-------------|------------|-----------|
| GR202 SRR202 | 8 Ohms | 2-Way | 80 | 80 Hz - 20 kHz | 87 dB | 90° | 6 kHz |
| GR203 SRR203 | 8 Ohms | 3-Way | 100 | 80 Hz - 22 kHz | 87 dB | 90° | 6 - 9 kHz |
| GRP502 SRRP502 | 8 Ohms | 2-Way | 120 | 60 Hz - 19 kHz | 90 dB | 90° | 6 kHz |
| GRP503 SRRP503 | 8 Ohms | 3-Way | 120 | 60 Hz - 22 kHz | 90 dB | 90° | 6 - 9 kHz |
| GR701 SRR701 | 70 Volts | Full Range | 2.5, 5, 10, 15 | 85 Hz - 22 kHz | 87 dB | 90° | 4 kHz |
| GR702 SRR702 | 70 Volts | 2-Way | 2.5, 5, 10, 15 | 90 Hz - 22 kHz | 87 dB | 90° | 6 kHz |
| GR703 SRR703 | 70 Volts | 3-Way | 2.5, 5, 10, 15 | 80 Hz - 20 kHz | 87 dB | 90° | 6 - 9 kHz |
| GRP572 SRRP572 | 70 Volts | 2-Way | 2.5, 5, 10, 15 | 80 Hz - 20 kHz | 87 dB | 90° | 6 kHz |
| GRP573 SRRP573 | 70 Volts | 3-Way | 2.5, 5, 10, 15 | 80 Hz - 20 kHz | 87 dB | 90° | 6 - 9 kHz |
| GRP5752 SRRP5752 | 70 Volts | 2-Way | 20, 30, 40, 50 | 80 Hz - 22 kHz | 89 dB | 90° | 6 - 9 kHz |
| GRP5753 SRRP5753 | 70 Volts | 3-Way | 20, 30, 40, 50 | 80 Hz - 20 kHz | 87 dB | 90° | 6 - 9 kHz |

Enclosure: Glass Fiber Reinforced Concrete

Dimensions (LxWxH): 23" x 21" x 11"

Weight: 45 lbs.

Colors: Granite, Sandstone

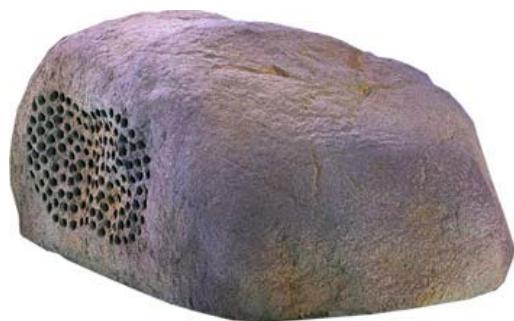

® OWI Incorporated

17141 Kingsview Avenue, Carson, CA 90746 USA

Tel: 310.515.1900

Toll Free: 800.638.1694

Fax: 310.515.1606

Web: www.owi-inc.com

E-mail: info@owi-inc.com